


1. Product picture

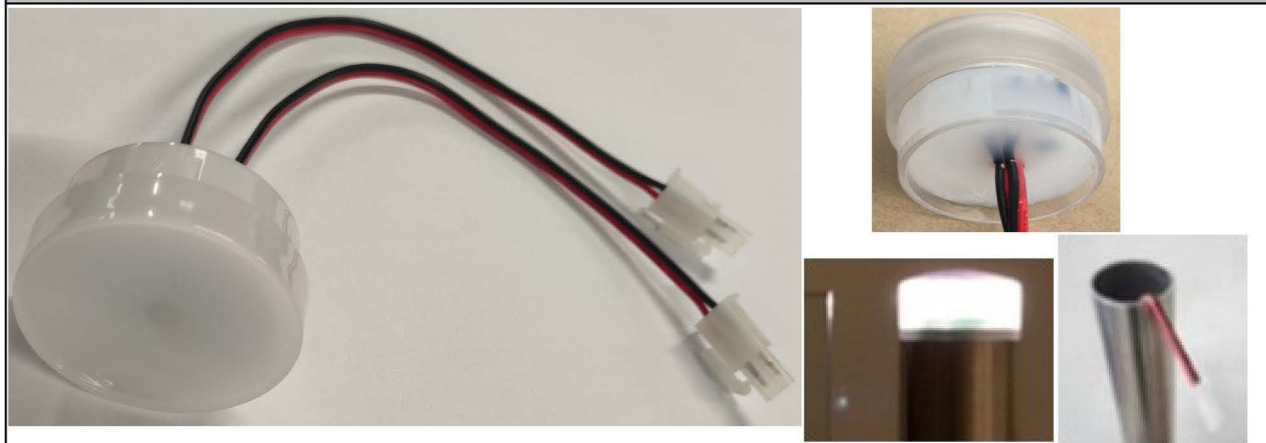

2. Product description

2.1. Product Name	Inoxa 2 LED
2.2. Product Model No.	FX120
2.3. Warranty	3 year

3. Electronic parameters

3.1. Rated voltage (V)	DC24V (SELV)
3.2. Rated power (W)	0.4W


4. General parameters LED

4.1. LED type / size	SMD 3014
4.2. Single LED current (mA)	16.7 mA \pm 5%
4.3. LED series/parallel mode LED	1S6P
4.4. Power for LED Module (W)	0.4W \pm 10%
4.5. LED brand	RE-FOND

Photoelectric parameters

4.6. Luminous flux (lm) (Ta=25°C free burning after 60min)	20-32 Lm	
4.7. Optical efficiency (lm/W)	\geq 55 lm/W	
4.8. Kelvin Color Temperature CCT and tolerance CCT	<input type="checkbox"/> IEC <input type="checkbox"/> ANSI 4000K	3985 \pm 225K
4.9. Color rendering index CRI	\geq 80	

Conditions of using			
4.10. Indoor / Outdoor use	<input checked="" type="checkbox"/> Indoor	<input checked="" type="checkbox"/> Outdoor	
4.11. IP	IP65 for lamp, IP20 for cable connectors		
4.12. UV Protective?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
4.13. Used in humid environment	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
4.14. Operating temperature range	Min	Typ	Max
	-20°C	25°C	40°C

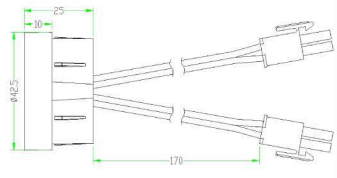5. Mechanical parameters		
sketch 	5.1. Dimension standard	Φ42.5x20
	5.2. Weight (g)	25 ± 3 g
	5.3. Lamp color	Opal
	5.4. Housing material	PC f1;

6.Package	
6.1 Qty per carton	200PCS/Carton
6.2 Packaging method	Bulk packaging
6.3 Carton size	392X392X370mm
6.4 Net/Gross weight	NW: 5KG GW: 6.2kg

